


ML1-WPB Weather Proof, surface mount microphone

Description

The ML1-WPB is a low cost, IP66 rated, omni-directional electret microphone for use with IP cameras accepting **microphone level input** signals (PC compatible input). The microphone is located on the bottom of the enclosure to reduce accumulation of water, snow, ice and dust. The attached cord is 6ft long and comes standard with a stereo 3.5mm connector on one end. Add -FL in the P/N for a flying lead output for connections to cameras with terminal blocks.

Note-camera must accept electret type microphone inputs

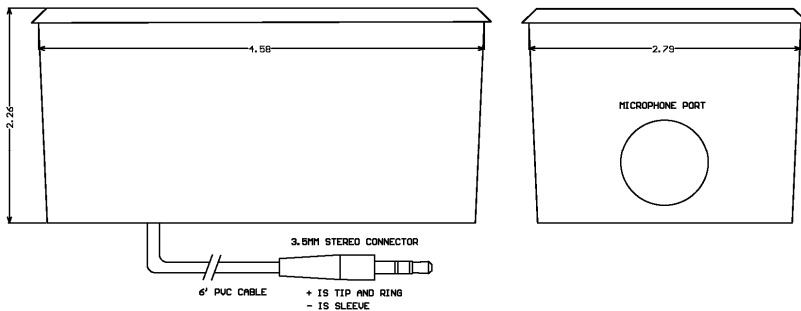

Caution

It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.

Warranty 1 year parts and labor, Made in USA

ML1-WPB Specifications

- Omni-directional pattern
- Max SPL 120db
- Frequency response: 50-16khz
- Sensitivity -43db
- -40dbm output (mic level)
- 2-10Vdc operation
- 2-5k Ohm load resistance
- S/N 60db
- 3.5mm stereo connector
- Aluminum Single gang housing
- Top and rear 1/2" conduit KOs
- Removable windscreen
- IP66 rated
- Operating temperature -30 to 85C
- Weight: 0.10 lbs

Includes

- ML1-WPB microphone.
- Warning label (on request).

Options

- Add -FL in P/N for flying lead output
- Add -LN to P/N for higher performance capsule: -28db sensitivity and 80db S/N ratio