




Electronic Technical Services Inc.  
211 Conchas SE  
Albuquerque, NM 87123  
PH 505-888-3923 FAX 505-888-3926

## PR3 3 Wiegand card reader combiner

### Description

The PR3 combines the data outputs of 3 Wiegand readers into a single output. The PR3 also distributes up to 2 LED / sounder outputs of the access control panel to all 3 readers.

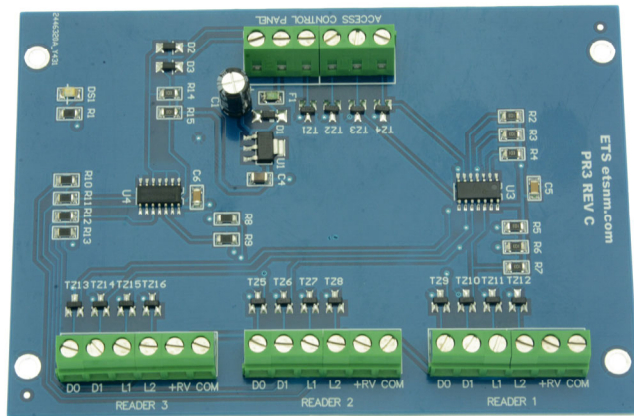

### Includes

- PR3 3 Wiegand reader combiner board
- Installation instructions

### PR3 Features and Specifications

- Combines 3 Wiegand reader outputs into 1 output.
- Buffered single reader output data port
- 2 LED or sounder inputs and outputs
- Open Collector LED / sounder outputs
- All I/O connections transient protected
- Terminal block connections
- Power: 12VDC @ 20mA.
- Reverse polarity protected and fused
- -40 to 125C Temperature range
- Dimensions: W3.40 x L4.80 x H.75
- Weight .06lbs

Warranty 1 year parts and labor.

Made in USA