




**Electronic Technical Services Inc.**  
211 Conchas SE  
Albuquerque, NM 87123  
PH 505-888-3923 FAX 505-888-3926  
Website: www.etsnm.com

**Sound Surveillance™**

# CSI-1 Compact, indoor/outdoor Station to Station Intercom

## Description

The CSI-1 is a compact, vandal resistant, indoor / outdoor station to station surveillance system/intercom. The master unit has a PTT button for initiating talk down to the slave unit or to mute listening to the Slave microphone. An optional call switch is available for the slave unit. The units connect to one another via a dedicated cat5/6 cable.

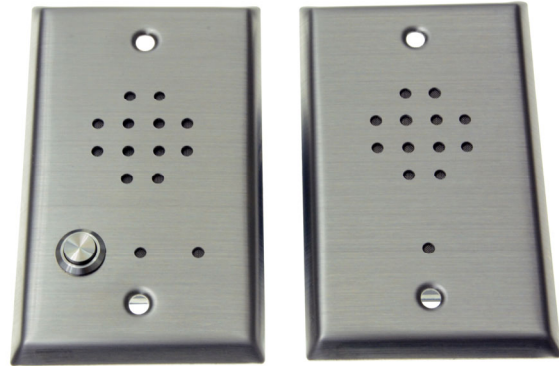

## Includes:

- CSI-1-M Master Speaker / Microphone
- CSI-S Slave Speaker / Microphone
- 12vdc 500ma Power Supply
- Mounting screws
- Installation instructions

## Wiring requirements:

1 CAT5/6 cable, 1000' maximum length

## Options:

- Ultra low noise, higher sensitivity microphone capsules. Add -LN to Part number
- CSI-S-C Call switch for slave unit

## Caution

*It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.*

## CSI-1 Specifications

- Weather resistant
- Vandal resistant
- Compact form
- Low noise MOSFET microphone pre-amplifiers
- 1.5" 1W speakers
- Microphones feature Omni-directional 25' pickup pattern
- 200Hz-10Khz Frequency response.
- Push to talk button on Master unit doubles as listen mute switch.
- Over talking tone alerts user on slave side that it's clear to talk.
- LED Talk Mute indicator on Master unit
- Adjustable speaker and call FTT tone levels
- Optional call switch for slave unit
- Power; 12Vdc @ 250ma
- Input power reverse polarity protected
- Stainless steel single gang plates
- Temperature range 0-70C
- Dimensions: L 4.5" x W 2.75" H 1.4"
- Combined Weight .25lbs

## Warranty

1 year parts and labor.

Made in USA